
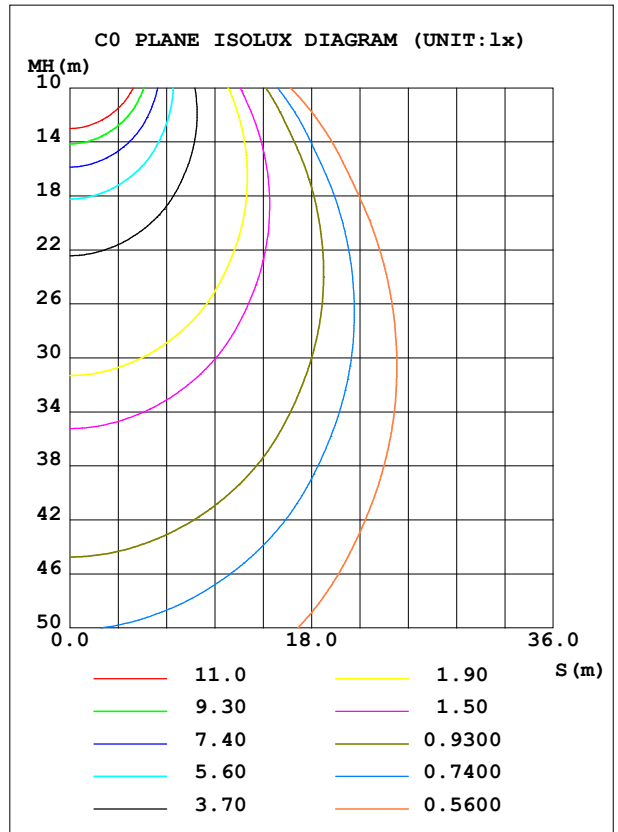


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 107.20 lm/W
MODEL	512	I _{max} (cd)	2024	S/MH (C0/180)	1.14	
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.84	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3337.0	η UP, DN (C0-180)	0.0, 64.9	
NOMINAL FLUX (lm)	3337.03	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 35.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00	
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	1.15	

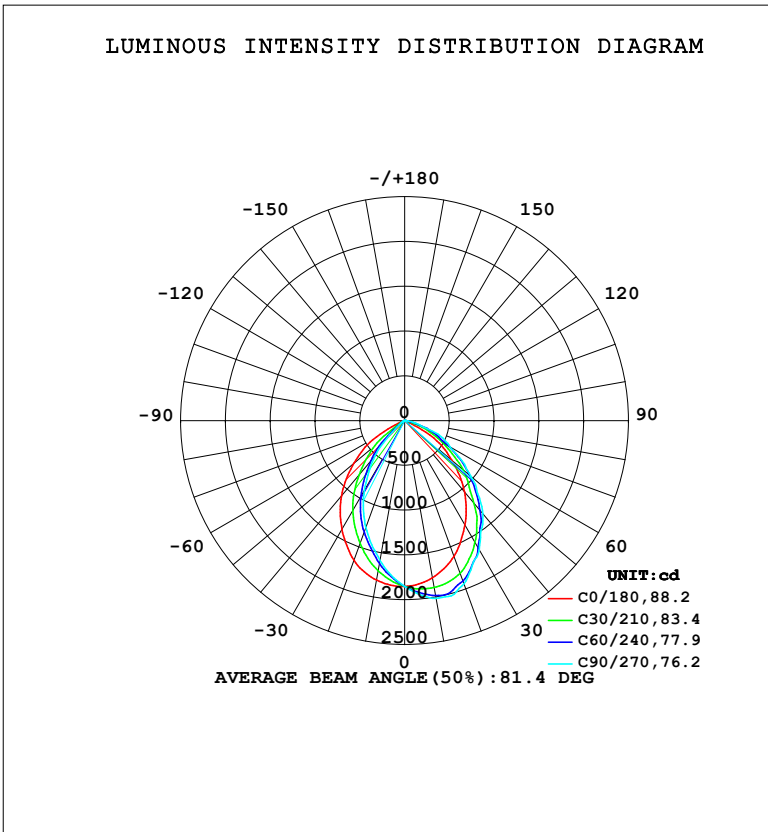

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2024-01-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1783	1944	2015	1958	1807	1657	1585	1641	0- 10	174.2	174.2	5.22,5.22
20	1613	1871	1940	1884	1659	1374	1270	1350	10- 20	484.7	658.9	19.7,19.7
30	1348	1615	1666	1642	1401	1055	901.7	1010	20- 30	681.2	1340	40.2,40.2
40	1039	1275	1356	1285	1099	671.9	520.0	647.6	30- 40	722.7	2063	61.8,61.8
50	687.1	910.7	967.3	924.2	737.0	271.2	97.85	215.5	40- 50	613.0	2676	80.2,80.2
60	327.4	548.7	587.0	550.0	366.0	52.58	30.45	51.13	50- 60	395.2	3071	92,92
70	39.28	239.5	267.0	243.9	40.06	16.33	12.10	16.70	60- 70	199.1	3270	98,98
80	8.848	20.77	81.62	25.18	9.250	7.281	1.795	7.673	70- 80	58.68	3329	99.8,99.8
90	0.8976	4.929	11.18	5.404	0.9873	1.927	2.193	2.239	80- 90	8.124	3337	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2393.5 lm

%lum = 71.7%

%lamp = 71.7%

Conical surface Flux(130deg): 3191.3 lm

%lum = 95.6%


%lamp = 95.6%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

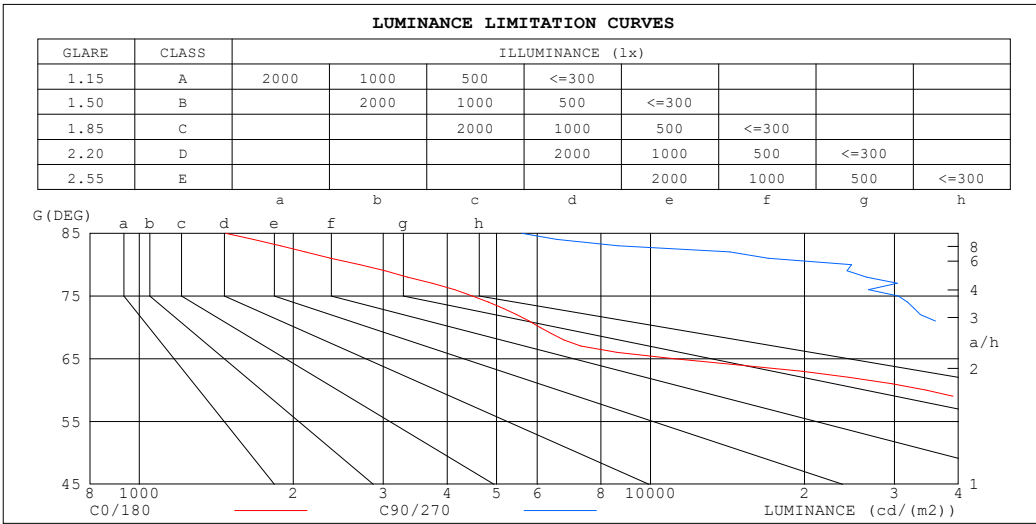

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1475	5598
80	2699	24728
75	4486	30541
70	6082	41065
65	11149	58865
60	34678	61760
55	49036	71843
50	56615	79162
45	65096	86045


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.08	1.04	1.01	1.05	1.02	.00	1.01	.99	.97	.97	.95	.94	.94	.92	.91	.89
2.0	.97	.91	.86	.95	.90	.85	.91	.87	.84	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.62	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.46	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

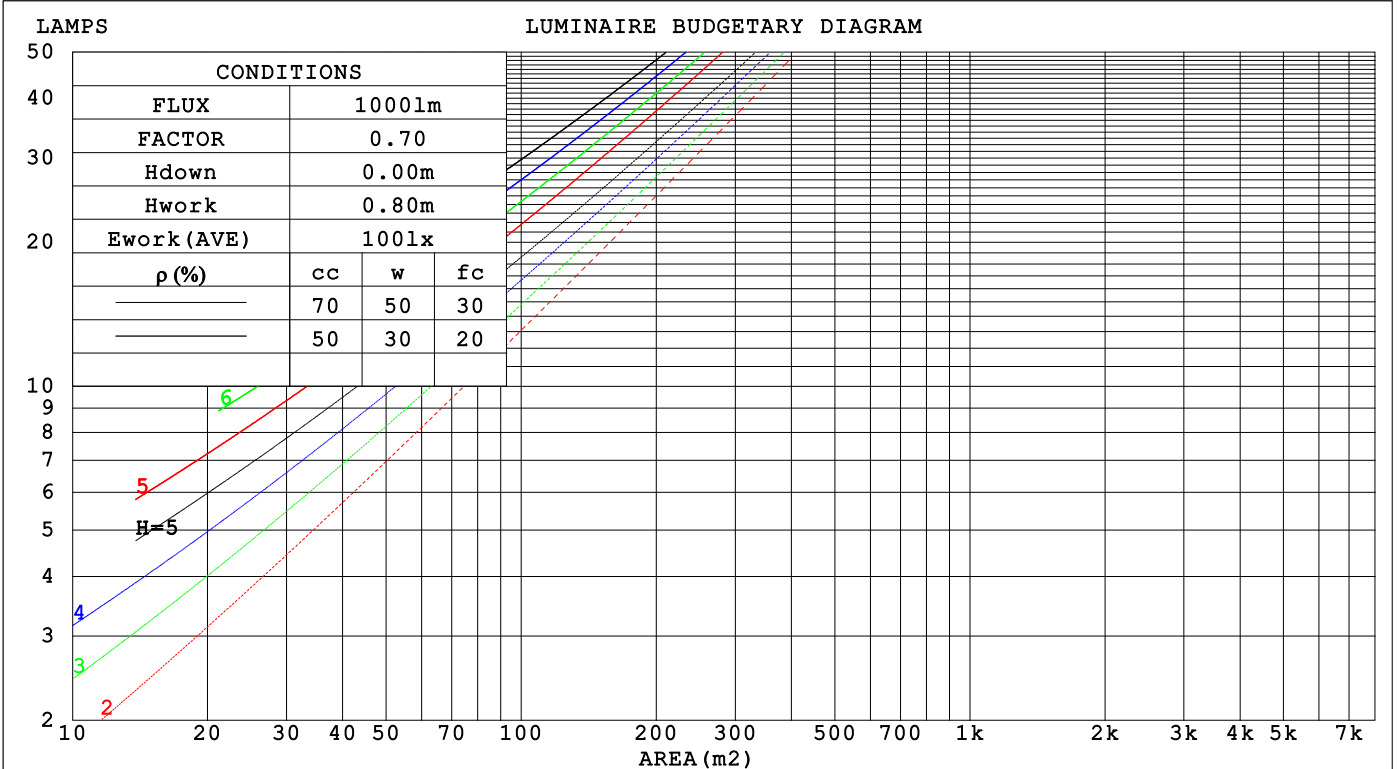

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz								
Lamp Flux:3337.03x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 143*134mm			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.239	.136	.043	.232	.132	.042	.219	.126	.040	.207	.120	.038	.196	.114	.037	
2.0	.233	.128	.039	.227	.125	.039	.216	.120	.037	.205	.115	.036	.196	.111	.035	
3.0	.222	.118	.035	.216	.116	.035	.207	.112	.034	.198	.108	.033	.189	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.101	.029	.193	.099	.029	.186	.097	.028	.179	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.027	.176	.090	.026	.169	.088	.026	.163	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.148	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.070	.020	.138	.068	.019	.134	.067	.019	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
5.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
9.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz										
Lamp Flux:3337.03x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.: 143*134mm				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.1	23.1	24.3	24.5	24.3	25.6	24.6	25.8	26.0
3H	22.9	24.1	23.2	24.3	24.5	25.3	26.5	25.6	26.7	26.9
4H	22.8	23.9	23.1	24.2	24.4	25.4	26.5	25.7	26.8	27.0
6H	22.7	23.8	23.0	24.0	24.3	25.5	26.5	25.8	26.8	27.1
8H	22.7	23.7	23.0	24.0	24.2	25.5	26.5	25.8	26.8	27.0
12H	22.6	23.6	23.0	23.9	24.2	25.4	26.4	25.8	26.7	27.0
4H 2H	23.4	24.5	23.7	24.7	25.0	24.6	25.7	24.9	25.9	26.2
3H	23.6	24.5	23.9	24.8	25.1	25.7	26.6	26.0	26.9	27.2
4H	23.5	24.4	23.9	24.7	25.0	25.8	26.7	26.2	27.0	27.4
6H	23.4	24.2	23.8	24.5	24.9	26.0	26.7	26.4	27.1	27.4
8H	23.4	24.1	23.8	24.4	24.8	26.0	26.7	26.4	27.0	27.4
12H	23.3	24.0	23.7	24.4	24.8	25.9	26.6	26.3	27.0	27.4
8H 4H	23.6	24.3	24.0	24.6	25.0	25.8	26.5	26.2	26.9	27.2
6H	23.5	24.1	23.9	24.5	24.9	25.9	26.5	26.4	26.9	27.4
8H	23.4	24.0	23.9	24.4	24.8	25.9	26.5	26.4	26.9	27.3
12H	23.4	23.8	23.9	24.3	24.8	25.9	26.4	26.4	26.8	27.3
12H 4H	23.5	24.2	23.9	24.6	24.9	25.7	26.4	26.2	26.8	27.2
6H	23.5	24.0	23.9	24.4	24.8	25.9	26.4	26.4	26.8	27.3
8H	23.4	23.9	23.9	24.3	24.8	25.9	26.3	26.4	26.8	27.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.8 / - 1.0					+ 0.2 / - 0.3				
1.5H	+ 0.4 / - 1.1					+ 0.4 / - 0.5				
2.0H	+ 0.8 / - 2.3					+ 0.8 / - 1.0				

CIE Pub.117, 3337 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.2)
 Area: 0.019 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	57	52	67	57	51	66	57	51	46
0.80	77	68	62	76	67	62	75	67	61	55
1.00	85	76	70	84	76	70	82	77	70	64
1.25	92	83	78	90	83	77	88	81	77	71
1.50	96	88	83	94	87	82	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	103	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

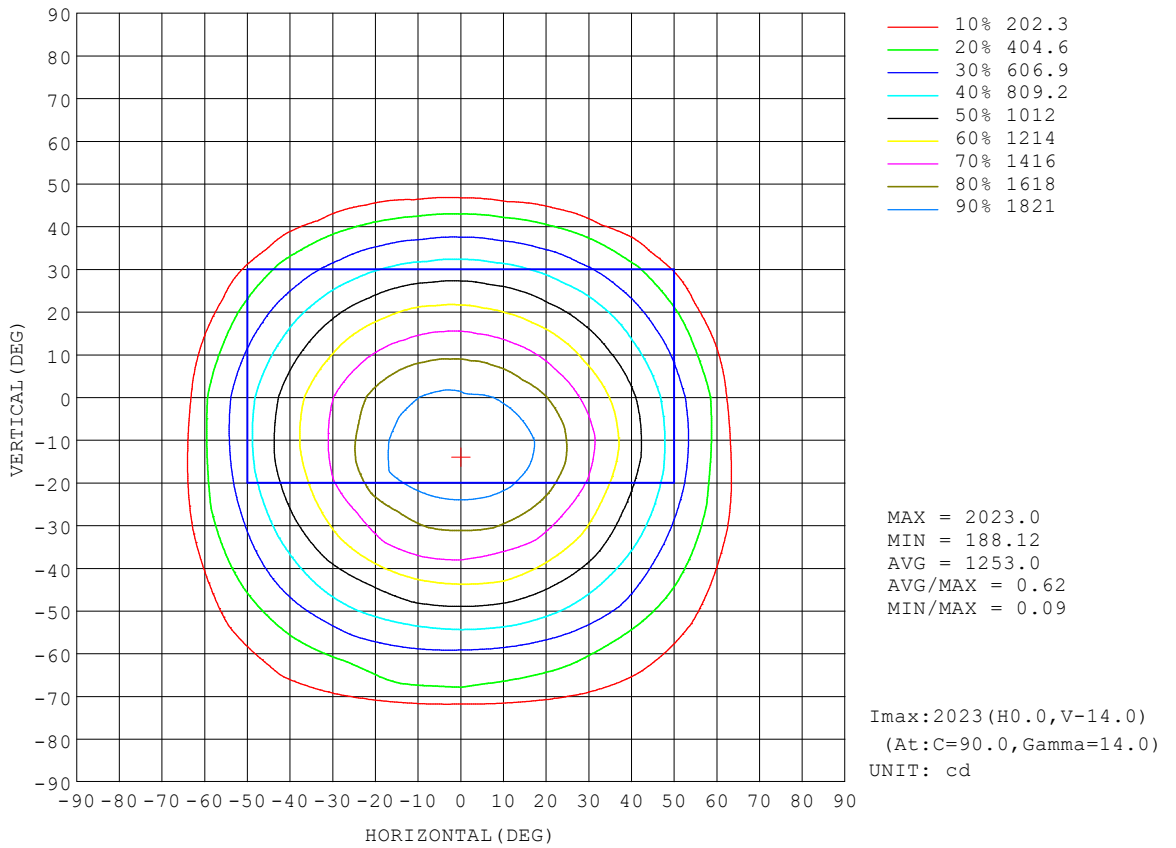


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

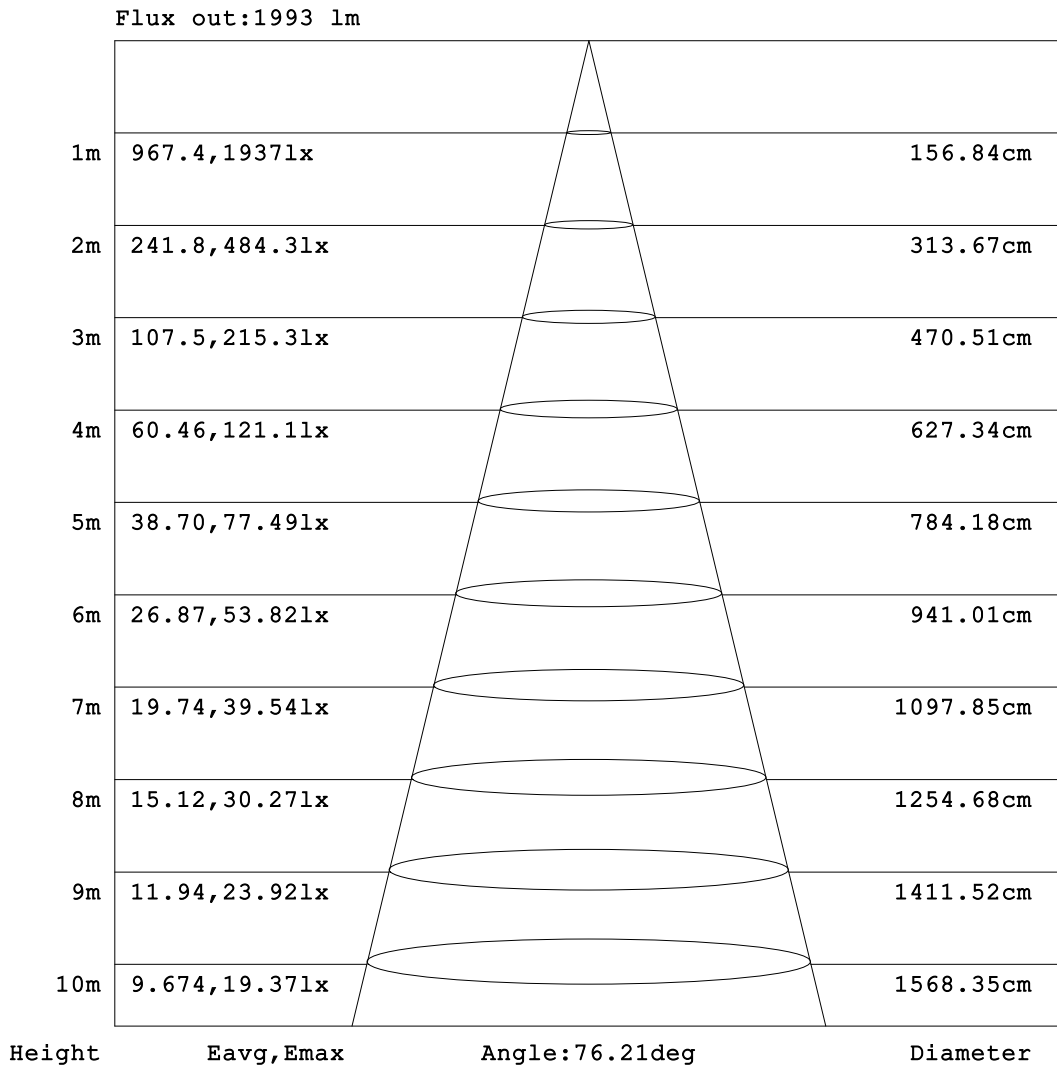


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2024-01-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

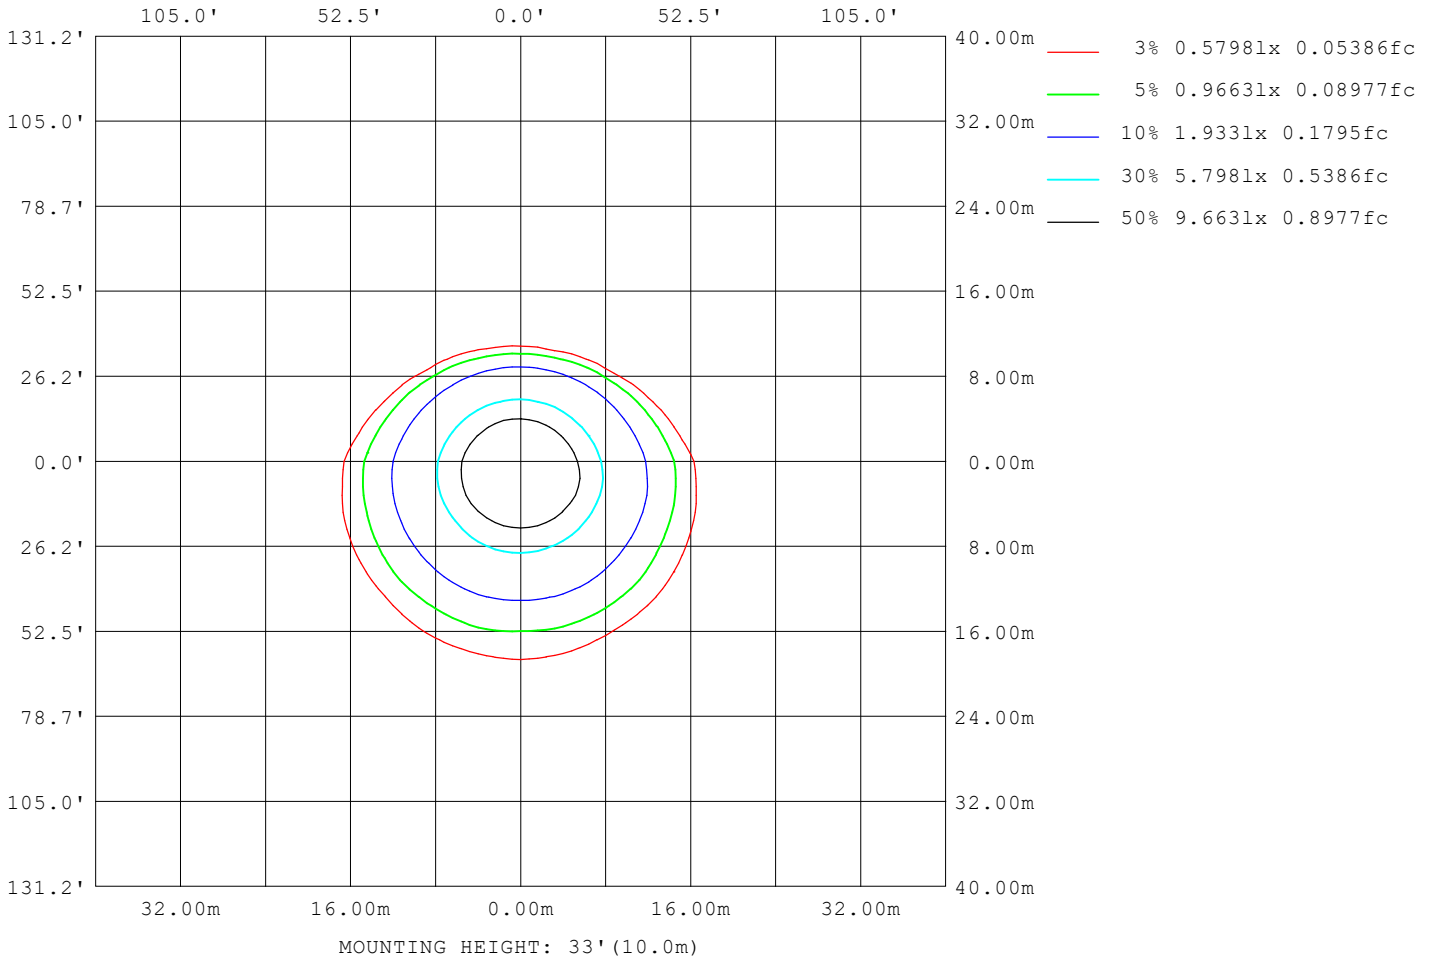

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12707
L_0~180 (75) av	4403
L_0~180 (85) av	1569
L_90~270 (65) av	30614
L_90~270 (75) av	15824
L_90~270 (85) av	3355
L_45 (65) av	25222
L_45 (75) av	13084
L_45 (85) av	4037

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

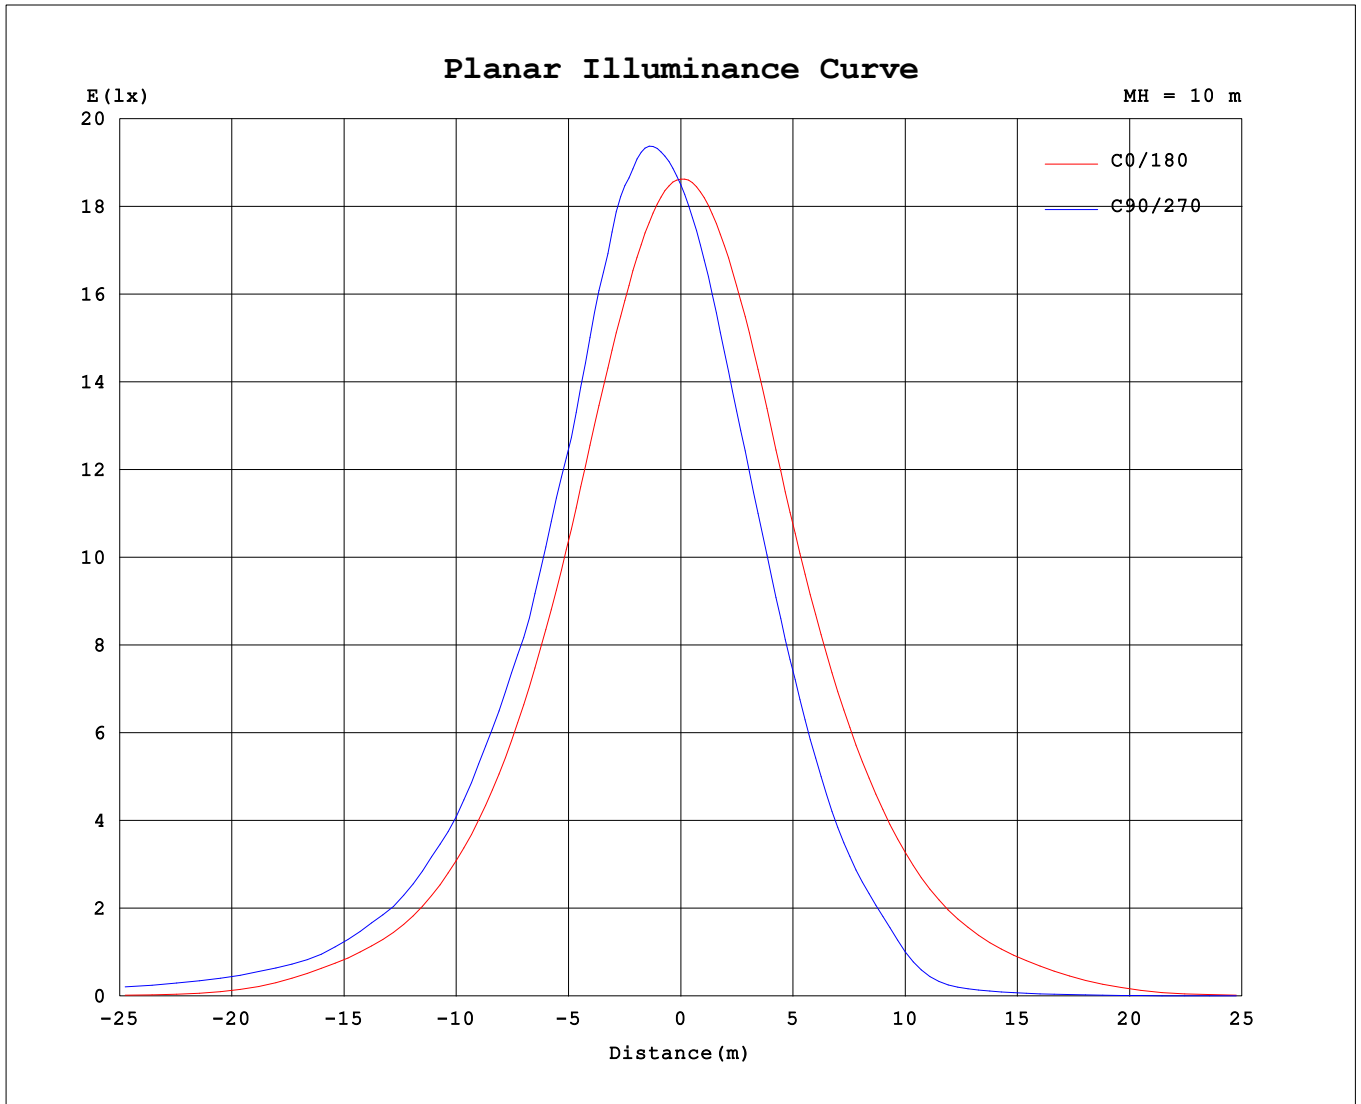

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.34V I:0.1456A P:31.128W PF:0.9706 Freq:50.00Hz		
Lamp Flux:3337.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 143*134mm	Shielding Angle:

Table--1

UNIT: cd

γ (DEG)\C (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850
5	1831	1859	1885	1909	1928	1943	1948	1946	1934	1918	1894	1869	1843	1814	1790	1766	1749	1737	1733
10	1783	1836	1891	1944	1983	2011	2015	2008	1986	1958	1910	1859	1807	1752	1705	1657	1622	1594	1585
15	1709	1788	1868	1946	1984	2007	2024	2016	1981	1936	1878	1825	1748	1667	1593	1520	1471	1442	1431
20	1613	1715	1814	1871	1907	1926	1940	1937	1929	1884	1822	1746	1659	1552	1457	1374	1326	1289	1270
25	1486	1614	1705	1753	1783	1790	1788	1795	1797	1807	1714	1628	1535	1416	1313	1226	1164	1112	1093
30	1348	1485	1569	1615	1642	1651	1666	1668	1632	1642	1581	1494	1401	1271	1160	1055	980	921	902
35	1200	1339	1406	1432	1466	1495	1488	1507	1499	1448	1425	1351	1256	1113	985	867	780	716	700
40	1039	1155	1204	1275	1306	1336	1356	1375	1343	1285	1241	1193	1099	939	794	672	587	536	520
45	869	974	1014	1072	1126	1176	1157	1162	1147	1122	1084	1036	921	752	607	493	405	321	287
50	687	796	855	911	942	966	967	984	937	924	881	835	737	577	438	271	164	109	97.9
55	531	608	650	707	764	780	783	778	766	759	694	640	566	390	181	83.8	69.5	55.4	53.2
60	327	431	490	549	566	576	587	591	592	550	516	467	366	145	62.5	52.6	43.0	33.2	30.4
65	89.0	270	326	357	410	457	473	454	408	390	353	293	115	51.2	39.4	31.2	25.5	19.4	18.7
70	39.3	70.4	177	240	277	300	267	280	300	244	194	83.0	40.1	31.3	22.3	16.3	15.1	14.0	12.1
75	21.9	27.4	46.2	116	126	126	150	164	123	121	54.2	27.3	21.4	16.2	10.8	9.38	9.44	7.35	5.37
80	8.85	13.6	17.1	20.8	40.8	71.4	81.6	61.0	42.8	25.2	17.3	12.8	9.25	6.55	5.69	7.28	5.76	2.42	1.79
85	2.43	4.24	5.53	8.32	7.85	9.34	9.27	9.48	8.10	8.18	5.48	4.26	2.77	3.14	5.01	4.97	4.40	2.08	1.84
90	0.90	1.51	2.35	4.93	8.40	10.1	11.2	11.6	9.76	5.40	2.61	1.65	0.99	2.19	3.31	1.93	1.99	2.15	2.19

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2024-01-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

